Classic Plus Stor-Lane® Reel

Assembly Instructions

PARTS INCLUDED:

- WHITE ALUMINUM CORE
- STEEL AXLE
- (2) WHITE ALUMINUM WHEELS
- (2) BLUE END FRAMES W/CASTERS
- HANDLE
- (2) BLUE SIDE RAILS
- (2) SPACER DISCS

Competitor®

THE OFFICIAL LANE LINE OF USA SWIMMING

THE OFFICIAL LANE LINE OF NCAA

STEP 1 ATTACH WHEELS TO THE CORE (CORE ASSEMBLY)

Use Hardware Bag "Step 1 - Core Assembly" which includes:
(5) 5/16" x 2" Hex Cap Screws, (7) 5/16" Hex Nuts, (12) Flat Washers

Core

Plus Wheel

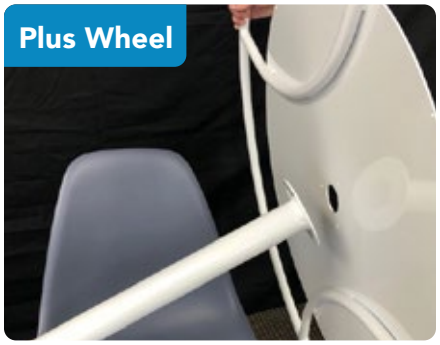

White Spacer Disc

Align the 3 holes in the Core, Plus Wheel, and White Spacer Disc.

Run bolts through the holes and fasten with washers and nuts.

Please note that the 'insert' on the White Spacer Disc should be pointing in and the Plus Wheel should be smooth-side out.

Repeat on the other side and the "Core Assembly" is complete.

Completed Assembly

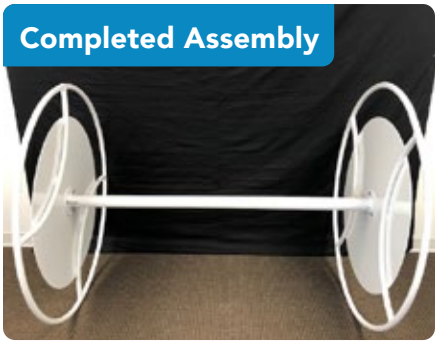

STEP 2 BUILDING THE FRAME - ATTACH SIDE RAILS TO END FRAMES

Use Hardware Bag "Step 2 – Building the Frame" which includes:
(4) ¼" x 2 ½ " screws , (4) ¼" Hex Nuts, (8) Flat Washers

Completed Frame

Use the end frame hardware bag to attach the 2 side rails to 1 end frame.

Match up the holes and put the screw in from top to bottom.

On the bottom side of the screw, attach the washer and then the nut.

Repeat #1, so both side rails are connected to the end frames.

STEP 3 CONNECT THE CORE ASSEMBLY TO THE FRAME

Use Hardware Bag "Step 3 - Connecting the Core & Frame" which includes:
(1) ¼" x 2 ½" screws, (2) ¼" Hex Nuts, (2) Flat Washers

Place the complete reel on the frame. Work the axle through the frame and core.

Match the holes of the end frame and axle. Use one of the two screws from the wheel bag and secure the frame to the axle with a screw and hex nut. Press in the red axle plug.

Axle Through Frame & Core

Completed Reel

STEP 4 ATTACHING THE HANDLES

Use Hardware Bag "Step 4 - Attaching the Handles" which includes:
(2) Red Plastic Axle Plugs, (1) Eye Bolt

Place the handle into the opening where the axle and end frame come together.

The red plastic axle plug will be needed on the non-handle side.

Screw in your eye bolt that is used to attach the first lane line

Handle

Eyebolt

STEP 5 FINISHING TOUCHES

Make sure brakes are in the "Active/On" position and upright, and put the cart in an upright position.

Add the remaining stoppers to the ends of the axle.

Tighten all bolts/nuts throughout the entire Classic Plus Stor-Lane® Reel.

Reel Away!

Competitor®

Since 1968, Competitor® has been the international leader in the production of lane lines and swim products for competitions around the world. As the official racing lane line for USA Swimming and the NCAA, Competitor guarantees superior swim products and outstanding customer service. Made, molded and assembled in the U.S., Competitor products are durable, easy to set up and store, and are sold through distributors, licensees and dealers.

800-888-SWIM (7946)

sales@competitorswim.com

competitorswim.com

PO Box 12160 Columbus, OH 43212

THE OFFICIAL LANE LINE OF USA SWIMMING®

THE OFFICIAL LANE LINE OF NCAA®